


# EPS PREPARATION FOR FLAT 60 HEAT RECOVERY UNIT

## EPS PREPARATION FOR WALL PASSAGE FOR FITT AGIX FLAT 60 AND PANEL 60 SERIES DECENTRALIZED RECUPERATORS

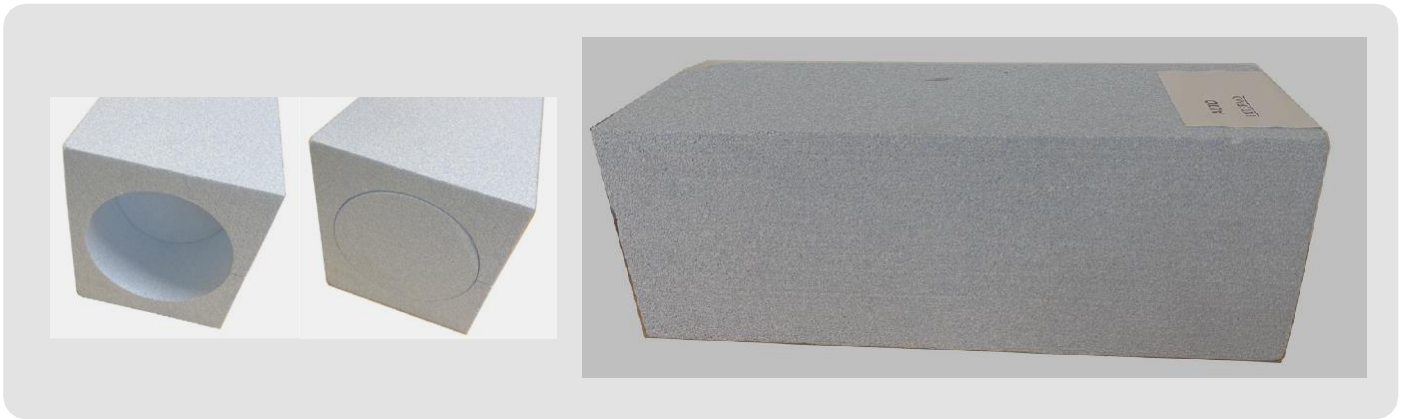

### CARATTERISTICHE

Provision of template within the masonry for subsequent installation of the **FLAT 60** or **PANEL 60** point recovery unit piping.

**Material:** **Cutttable** Sintered Expanded Polystyrene.

**Installation:** the arrangement should be inserted, perfectly "level",

inside the masonry (leaving the cylindrical part\* inside). Make sure that the face on outer wall is the one that allows water (should it form) to escape through the 1% slope already provided for the cylinder itself.

\* Remove the cylindrical part just before inserting the tubing of FLAT 60 or PANEL 60.

**Code:** **VMA60-FLATPRE**

### DIMENSIONAL

