

VMSI16 series silencers

VMSI16 SERIES FLEXIBLE SILENCERS



FEATURES

Flexible silencers, for rigid EPP pipes and for flexible pipes, formed by pieces of plastic with spiral tube.
 Glass wool 25 mm thick insulation, density 16 kg/m³, with 150 µm thick nonwoven inner membrane.
 Fiberglass-reinforced aluminized polyester outer protection.

Max continuous mean temperature:
 90°C

Fixing methods:





- By means of joint sleeves -Q/03 series and stainless steel clamps
- N/0160 series for silencer fixed on flexible pipe or fixed on EPP pipe/connection.
- By means of clamps mod. -N/0160 series, or plastic clamps, for silencer fixed on collar.

TECHNICAL SPECIFICATIONS

CODE	No. silencers	Connection diameter	Silencer length (m)
Flexible silencers			
VMSI16125	1	Ø125	1
VMSI16160	1	Ø160	1
VMSI16180	1	Ø180	1,5
VMSI1620015	1	Ø200	1,5
VMSI1625020	1	Ø250	2
Tubes for making flexible silencers			
VMSI16200	/	Ø200	10 (*)
VMSI16250	/	Ø250	10 (*)

(*) The item corresponds to a 10 ml package of tube for making silencers by the customer directly on site, of the desired length. The tubes are supplied without "collar" shaped ends. It is the customer's responsibility, in addition to cutting the pipes, to make the "collars" at the ends.

GRAPHICS

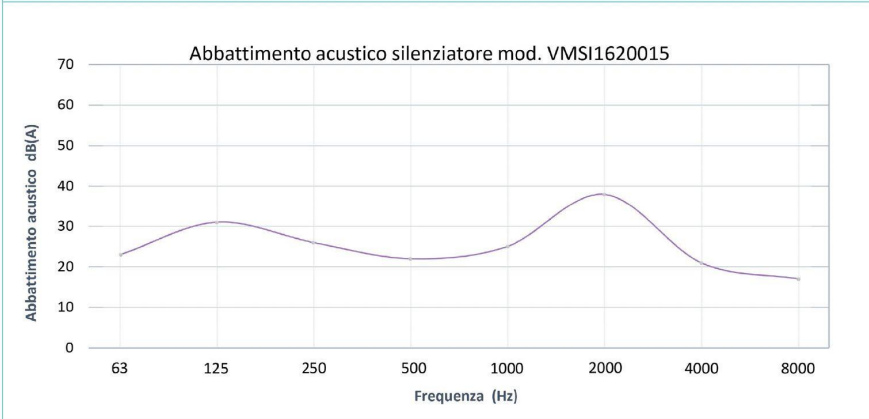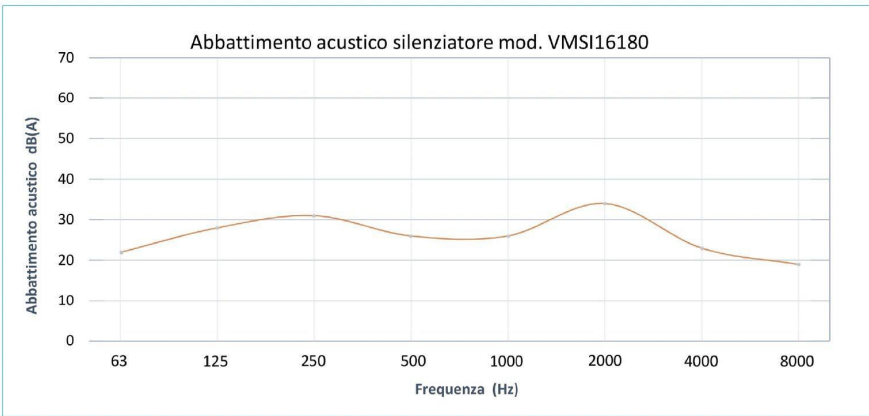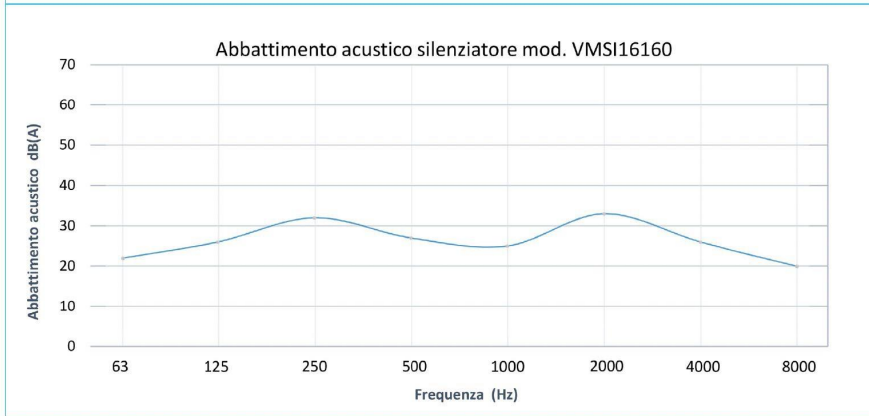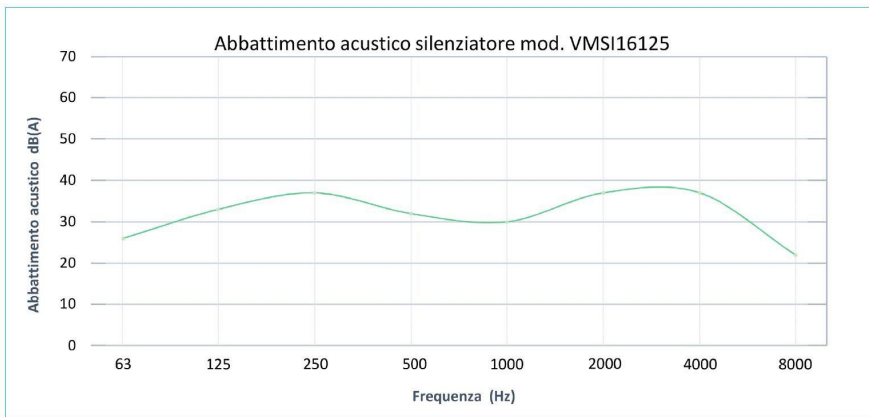

REV 10/2024