


# EASYCOMBI supply/return nozzle

---

## EASYCOMBI SUPPLY/RETURN OUTLET

---

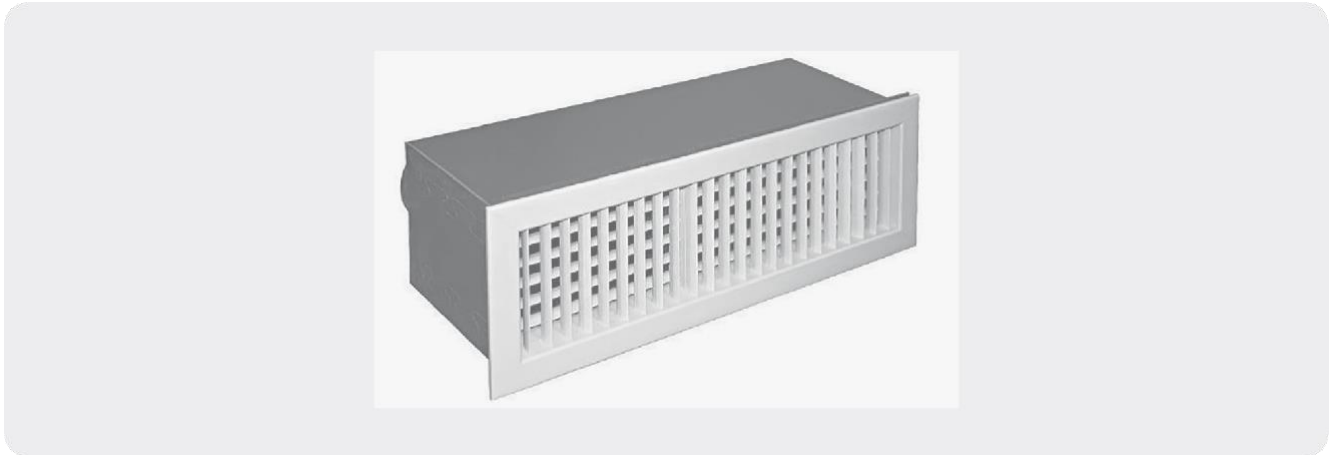


---

### CARATTERISTICHE

EasyCombi is a vent with supply and return integrated into one unit. It is equipped with an airtight separation between the supply side and the return side to prevent air short-circuits. It results aesthetically as a single vent.

**Material of construction:** anti-condensation PVC

**Color:** White RAL 9010

**Flap pitch:** 20mm

**Extinguishing grade:** Class V0 Operating temperature: -30°C/+60°C Fixing methods: Clips


---

### ACCESSORIES


- Calibration damper mod. COMBIS01500X150.
- PVC plenum mod. COMBIPLE500X150.

---

### DIMENSIONS

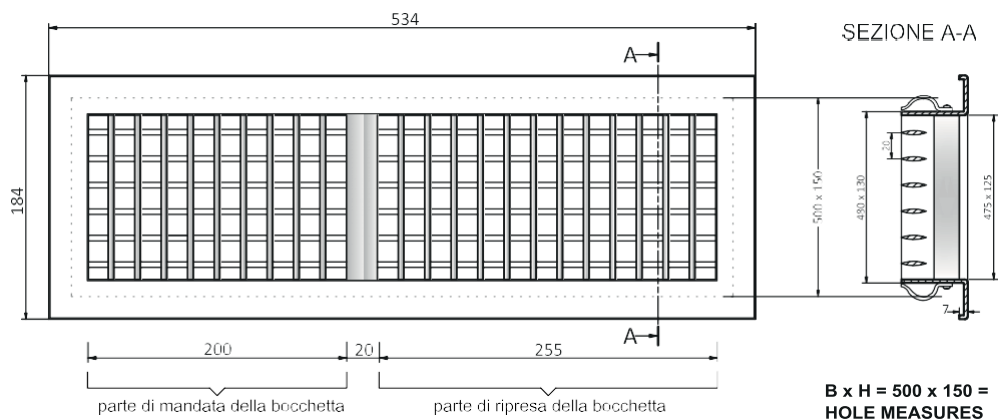


### COMBIS01500X150 CONTRAST MANUAL CALIBRATION DAMPER

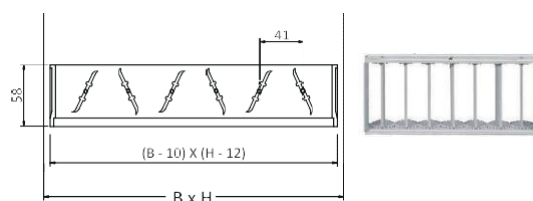


## PLENUM MOD. COMBIPL500X150

Plenum, PVC anti-condensation with bulkhead, complete with two oval collars of equivalent diameter  $\varnothing_{eq.}$  145mm (upon request, it is possible to have two collars of diameter  $\varnothing_{eq.}$  125mm instead of  $\varnothing_{eq.}$  145).

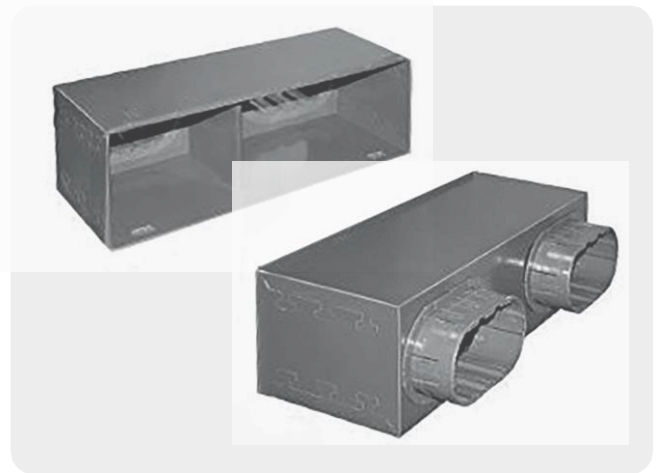


## DIMENSIONS

Drawing of COMBIPL 500x150 mm plenum with custom  $\varnothing_{eq}$ 125mm connections.

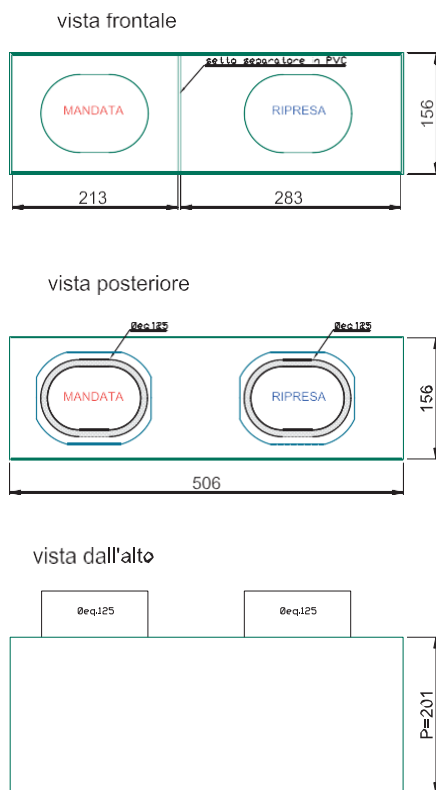

Drawing of COMBIPL 500x150mm plenum with standard  $\varnothing_{eq}$ 145mm connections.

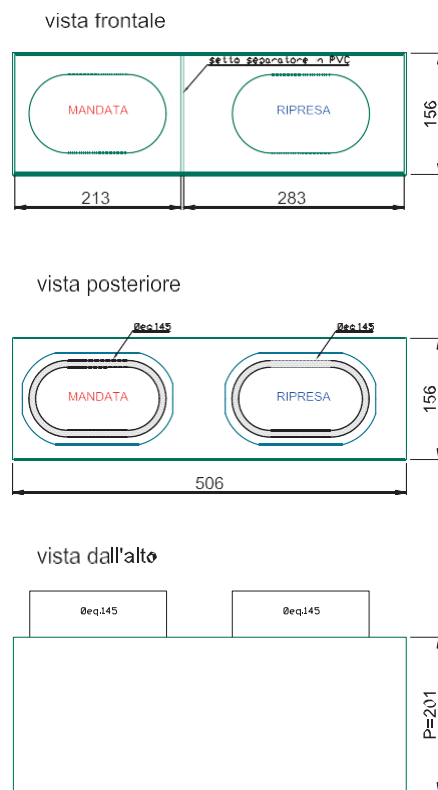

## EASY COMBI TABLE 500x150

Description	Effective area [m <sup>2</sup> ]	Flow rate (m <sup>3</sup> /h) with v=1m/s Pressure drop: 1 Pa	Flow rate (m <sup>3</sup> /h) with v=2m/s Pressure drop: 3 Pa	Flow rate (m <sup>3</sup> /h) with v=2.5m/s Pressure drop: 5 Pa	Flow rate (m <sup>3</sup> /h) with v=3m/s Pressure drop: 7 Pa	Flow rate (m <sup>3</sup> /h) with v=4m/s Pressure drop: 12 Pa
Mandate	0.0200	72	144	180	216	288
Resume	0.0255	94	187	235	282	374