


EASYCOMBI supply/return nozzle

EASYCOMBI SUPPLY/RETURN OUTLET

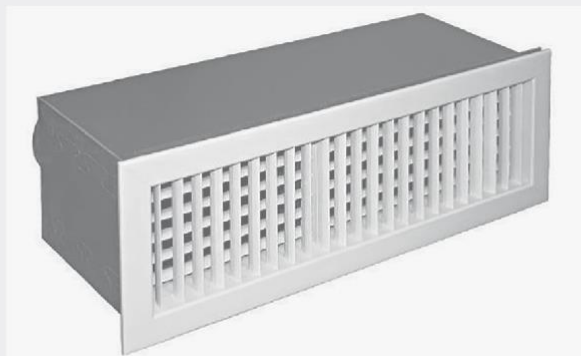

CARATTERISTICHE

EasyCombi is a vent with supply and return integrated into one unit. It is equipped with an airtight separation between the supply side and the return side to prevent air short-circuits. It results aesthetically as a single vent.

Material of construction: anti-condensation PVC

Color: White RAL 9010


Flap pitch: 20mm

Extinguishing grade: Class V0 Operating temperature: -30°C/+60°C Fixing methods: Clips


ACCESSORIES

- Calibration damper mod. COMBIS01500X150.
- PVC plenum mod. COMBIPLE500X150.

DIMENSIONS

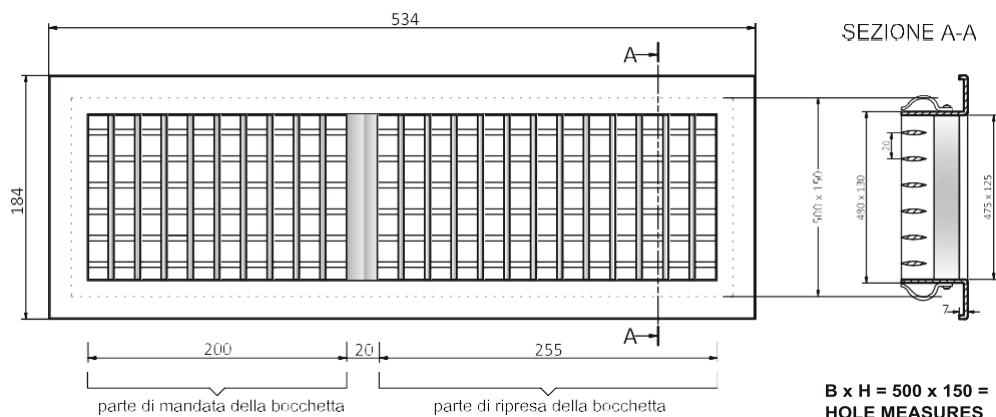


COMBIS01500X150 CONTRAST MANUAL CALIBRATION DAMPER

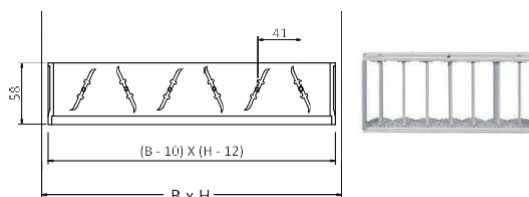


PLENUM MOD. COMBIPL500X150

Plenum, PVC anti-condensation with bulkhead, complete with two oval collars of equivalent diameter $\varnothing_{eq.}$ 145mm (upon request, it is possible to have two collars of diameter $\varnothing_{eq.}$ 125mm instead of $\varnothing_{eq.}$ 145).

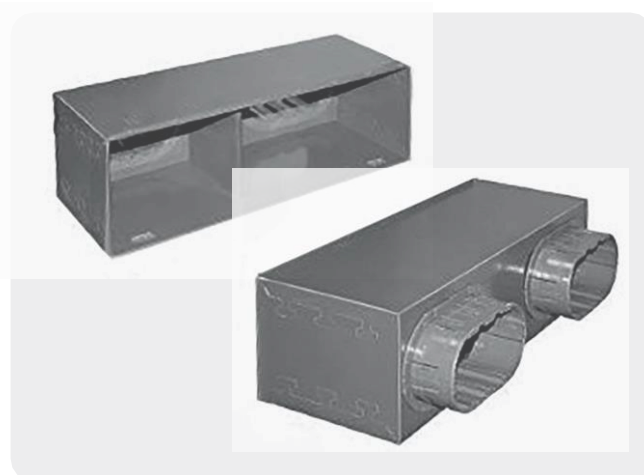


DIMENSIONS

Drawing of COMBIPL 500x150 mm plenum with custom \varnothing_{eq} 125mm connections.

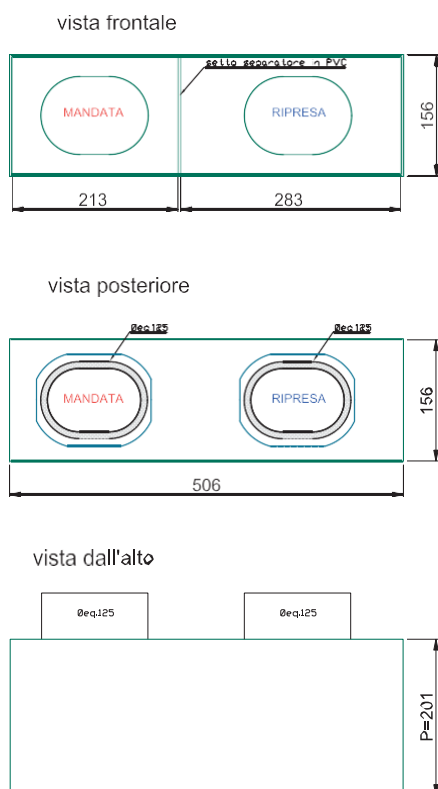

Drawing of COMBIPL 500x150mm plenum with standard \varnothing_{eq} 145mm connections.

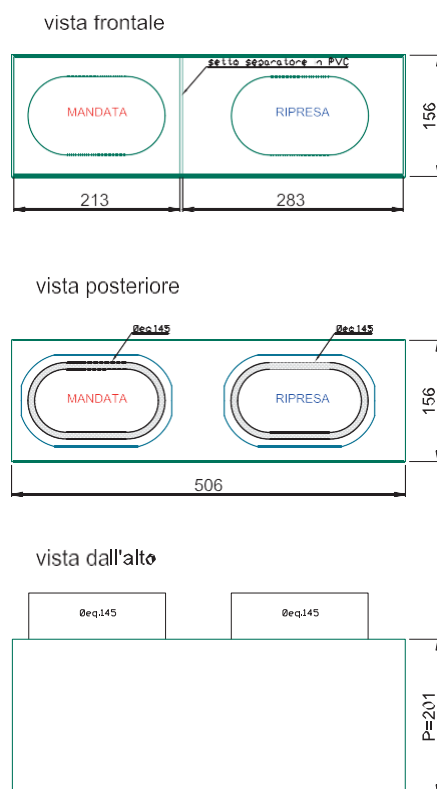

EASY COMBI TABLE 500x150

Description	Effective area [m ²]	Flow rate (m ³ /h) with v=1m/s Pressure drop: 1 Pa	Flow rate (m ³ /h) with v=2m/s Pressure drop: 3 Pa	Flow rate (m ³ /h) with v=2.5m/s Pressure drop: 5 Pa	Flow rate (m ³ /h) with v=3m/s Pressure drop: 7 Pa	Flow rate (m ³ /h) with v=4m/s Pressure drop: 12 Pa
Mandate	0.0200	72	144	180	216	288
Resume	0.0255	94	187	235	282	374