


# recovery unit fitt agix panel 60

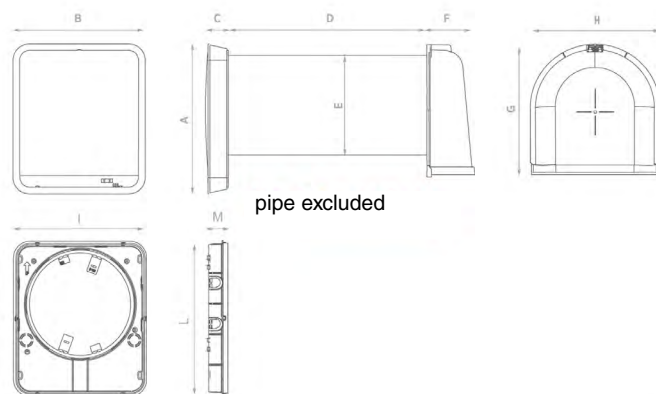

MODEL	A	B	C	D	E	F	G	H	I	L	M
PANEL60	261	261	44,5	500	Ø160	93,5	265	260	264,5	304	38

## DECENTRALISED ALTERNATING-FLOW HEAT RECOVERY UNIT

- Motor housing placed inside the wall behind the heat exchanger to make the product highly silent;
- High efficiency heat exchanger (up to 93%) made of ceramic material;
- Made of long life, high quality finest materials, with elegant design.
- Frontal cover in ABS and external grille in ASA, a noble material that resists to UV rays, heat, bumps and aging, and therefore perfectly suited for outdoor use;
- Tilting opening system of the front panel to prevent ingress of air when the fan is OFF;
- Possibility to install the product as built-in version thanks to the "Built-in Kit" included in the box;
- External grille made of ABS specifically designed to reduce the outside noise;
- 250mm minimum wall depth for the wall version and 300mm for the built-in version. 3m maximum wall depth (2.5m in case of 90° curve).
- DC ball bearing motor impeller, brushless with electronic commutation;
- Long life and low energy consumption;
- Easy cleaning and maintenance;

- Double dust filter, washable and easy to access;
- IPX4 protection degree;
- Led indicator for functions and filter cleaning;
- Humidity and twilight sensors;
- Remote control included in delivery;
- No condensation drainage required;
- Working Temperature Range: - 30°C + 50°C.
- Possibility to change standard filters with optionals;
- 2 vers.: - PANEL WIRELESS (wireless connection) - PANEL APP (connection with App).
- POSITIONING: Panel's designed to be installed in any room of the house. Thanks to the synchronisation-technology, the products will communicate with each other's in order to achieve maximum efficiency

NB: Ø 160 mm pipe excluded from delivery

## TECHNICAL DATA

	FITT AGIX PANEL 60 WIRELESS	FITT AGIX PANEL 60 APP
Ø [mm] Duct excluded	160	160
Voltage [Volt]	220-240	220-240
Frequency [Hz]	50	50
Flow Rate "IN" [m³/h]	60	60
Flow rate "OUT" [m³/h]	60	60
Control	Remote control	Smartphone
Master Slave Connection	Wireless	APP for Smartphone
Power [W]	6,6	6,6
Noise [dB(A)3m]	25	25
Weight [kg]	5,3	5,3

---

**FITT AGIX PANEL 60**

---

Code	Description
VMPANEL60-W	FITT AGIX PANEL 60 WIRELESS
VMPANEL60-APP	FITT AGIX PANEL 60 APP with smartphone application

---

---

**ACCESSORIES**

---

Code	Description
VMA36-FLAT-WP	«Master» remote Panel for Wireless
VMA36-FLAT-WPCO	«Master» remote Panel for Wireless + CO2 sensor

---

**WIRELESS version's main technical features:**

- Wireless connection between the units;
- Remote control with display (accessory sold separately);
- Integrated humidity and twilight sensors which allow several automatic functioning modes (see remote control);
- Up to 16 units communicating in sequence in the same system in master/slave mode, through easy dip switches configuration;
- 4 adjustable speeds (including 1 night speed).

**APP version is equipped with:**

- Communication between the units via WiFi;
- Possibility to control the units via Smartphone thanks to the AIR.app even remotely;
- Integrated humidity, twilight, Temperature and VOC sensors which allows several modes of automatic operation;
- SMART mode which allows the comparison of inside and outside air quality data thanks to the connection to the nearest weather station. This will allow the product to adjust automatically its functioning according to the detected parameters;
- Possibility to configure up to 16 units inside the system via APP;
- 4 adjustable speeds (including 1 night speed).

Possibility to install the wall version or the built-in version thanks to the "Built-in Kit" included in the box.



---

**ACCESSORIES**


---

Code	Description	Suitable for
VMA60TI500	Predisposition pipe Ø160 L=500 mm	FITT AGIX FLAT 60 e PANEL60
VMA60TI700	Predisposition pipe Ø160 L=700 mm	FITT AGIX FLAT 60 e PANEL60
VMA60-FLATPRE	Polystyrene preparation (light blue)	FITT AGIX FLAT 60 e PANEL60
VMA60-FLATSIL	PET-coated polyester fibre silencer for pipe 160	FITT AGIX FLAT 60 e PANEL60
VMKSA60-FLAT2	Jamb installation kit (lowered type)	FITT AGIX FLAT 60 e PANEL60
VMA60FILTRI	Kit no. 4 honeycomb filters	FITT AGIX FLAT 60 e PANEL60
VMGRESIR160	External folding grille quick installation from inside	FITT AGIX FLAT 60 e PANEL60
VMGAIR160A60	External grille with collar Ø160	FITT AGIX FLAT 60 e PANEL60
VMA36-FLAT-WP	MASTER remote panel	FITT AGIX FLAT • WIRELESS / PANEL•-W
VMA36-FLAT-WPCO	MASTER remote panel + CO2 sensor	FITT AGIX FLAT • WIRELESS / PANEL•-W

---

## Functioning schemes

### Wireless Version

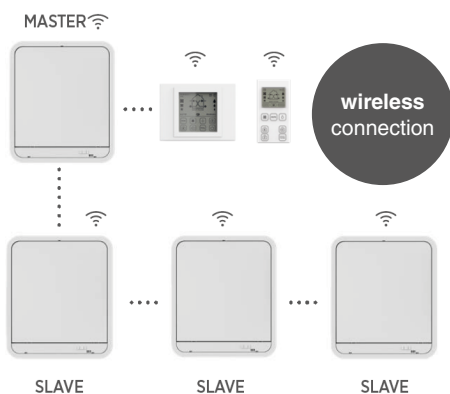

### APP Version

