


VMKSA60-FLAT2 "JAMB KIT"

VMKSA60-FLAT2 "JAMB KIT" for "FLAT 60" / "PANEL 60" series HRV units

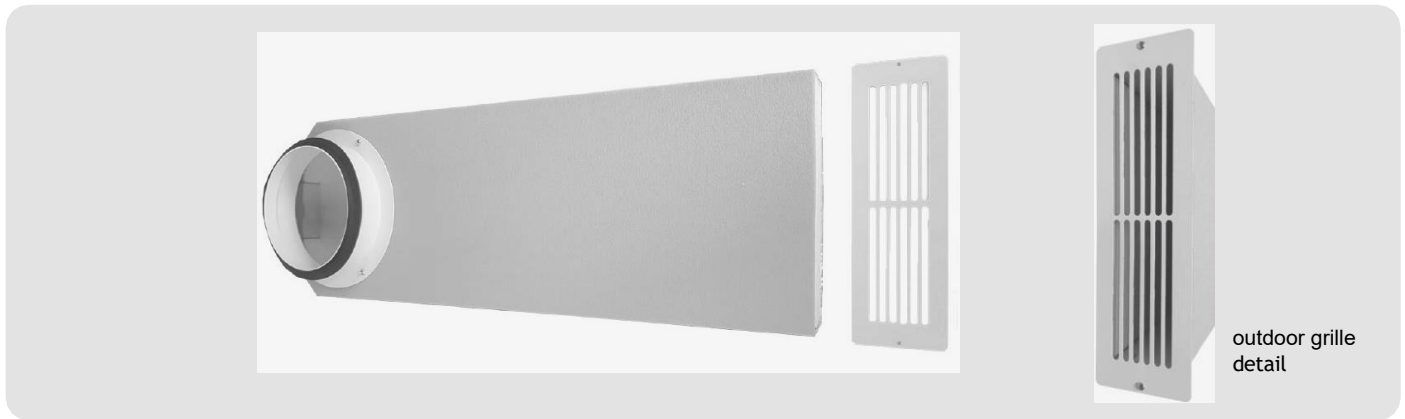

FEATURES

Kit for installation of "Flat 60" and "Panel 60" HRV units in the case the outdoor part (grille) must exit on window jamb instead of on external face wall: the standard HRV unit outdoor grille is thrown away. The "JAMB KIT" consists of:

- no. 1 "rectangular duct" made of 3 mm thick RAL7035 anti-condensation PVC, with a 3 mm thick PE foam external insulation, measuring 60x222 mm externally, with positioned a circular collar (equipped with a sealing gasket) for connection to the Øe160 HRV unit tube (**).
- no. 1 polystyrene cap, 48x210 mm, to protect the rectangular duct, to be removed at the time of installation of the outdoor grille once the installation of the jamb/HRV unit kit is completed;
- no. 1 outdoor grille, 75x250 mm, made of RAL9010 white pre-painted plate aluminum (a stainless steel grille can also be ordered upon request);
- no. 1 outdoor grille fixing kit, composed of 2 plugs and 2 screws.



The "rectangular duct" can be cut, on construction site, to size as needed. It should be laid toward the outdoor grille with a 2-3% slope gradient, so as to prevent water from possibly stagnating inside it. In case the "duct" is cut, be sure to properly reposition then the polystyrene cap to prevent the "duct" from getting dirty.

() MINIMUM USEFUL LENGTH OF THE Ø_e160 HRV UNIT TUBE= 25-28 cm**

In case a tube length between 25 cm and 28 cm is needed, it is necessary to shorten the circular collar by 3 cm.

In the case of "PANEL 60" installation in the solution with a flush wall mounted internal part, the tube should always be min. 25-28 cm, but 5 cm of the thickness of the indoor unit should also be added to calculate the minimum wall thickness.



TECHNICAL AND DIMENSIONAL DRAWING

Il kit comprende di serie la Griglia esterna in alluminio preverniciato b.co RAL9010 spess. 1,2 mm, fissabile con viti e tasselli a corredo.

Su richiesta, è possibile ordinare, a parte, una Griglia esterna in acciaio inox sp.1 mm

