


LOWERED JAMB INSTALLATION KIT

LOWERED JAMB INSTALLATION KIT OF FITT AGIX FLAT 60 / PANEL 60 RECUPERATORS - COD. VMKSA60-FLAT2

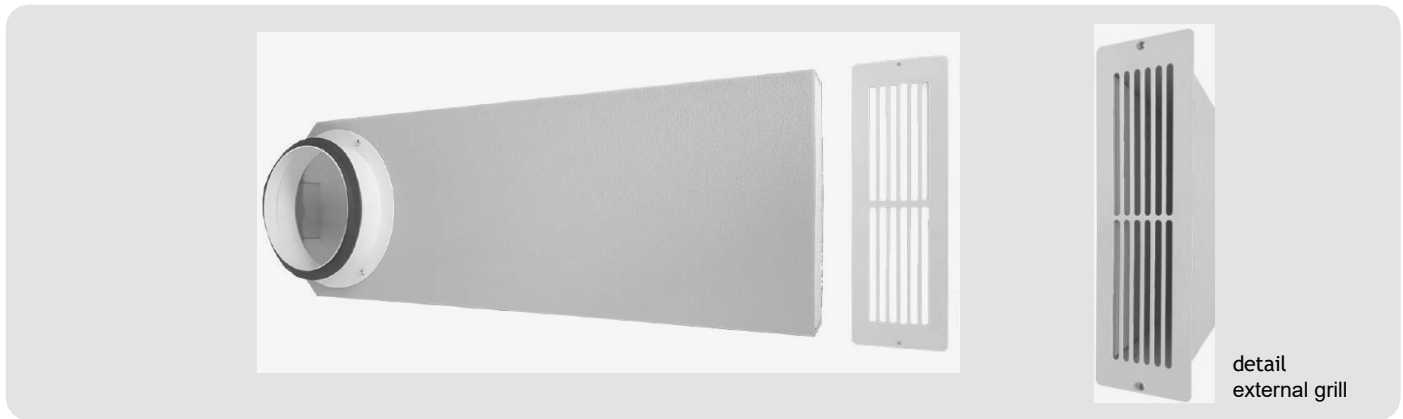

CARATTERISTICHE

Kit for installation of FITT Agix Flat 60 and FITT Agix Panel 60 heat recuperators, having external part (grid) exiting on window jamb instead of directly on external wall as usual. It consists of:

- no. 1 "rectangular **pipe**" made of 3 mm thick RAL7035 anti-condensation PVC measuring 54x216 mm, insulated externally with a 3 mm thick PE foam lining, and thus measuring 60x222 mm externally, with positioned a circular **collar** (equipped with a sealing gasket) for connection to the Øe160 **pipe** of recuperator preparation (**).

- no. 1 **48x210 mm polystyrene** cap to protect the rectangular pipe, to be removed at the time of installation of the external grille, once the installation of the jamb/recuperer kit is completed;

- n. 1 flat outdoor **grille made of RAL9010 white** pre-painted aluminum (a stainless steel grille can also be ordered upon request), having a size of 75x250 mm;

- n. 1 x **Grill Fixing Kit external** composed of 2 plugs and 2 screws.



The "rectangular pipe," which can be cut on site to size as needed, should be laid with a slope toward the outer grate with a 2-3% gradient so as to prevent water from possibly stagnating inside it. In case the pipe is cut, be sure to properly reposition then the styrofoam cap to prevent the pipe from getting dirty.

() MIN. LENGTH. USEFUL PIPE Øe160= 25 -28 cm**

In case a pipe length between 25 cm and 28 cm is needed, it is necessary to shorten the circular collar by 3 cm.

In the case of PANEL 60 installation in the solution with a built-in indoor unit, the pipe should always be min. 25-28 cm, but 5 cm of the thickness of the indoor unit should also be added to calculate the minimum wall thickness.



TECHNICAL AND DIMENSIONAL DRAWING

Il kit comprende di serie la Griglia esterna in alluminio preverniciato b.co RAL9010 spess. 1,2 mm, fissabile con viti e tasselli a corredo.

Su richiesta, è possibile ordinare, a parte, una Griglia esterna in acciaio inox sp.1 mm

