


fitt agix flat 30 decentralised recovery unit

FITT AGIX FLAT 30 DECENTRALISED RECOVERY UNIT

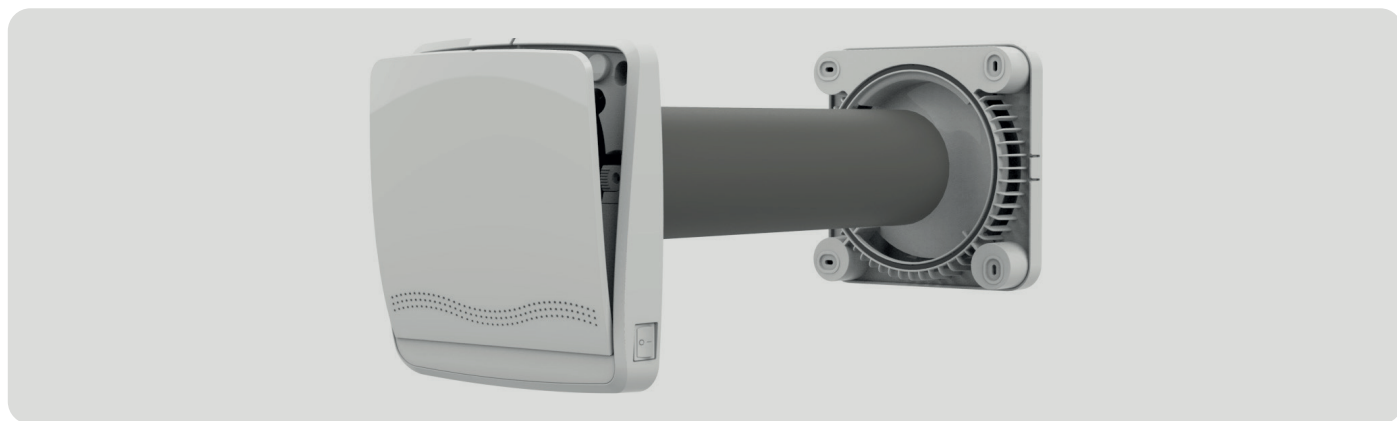

FITT AGIX FLAT 30 FEATURES


- Elegant design from both the inside (depth of only 4 cm) and outside;
- L=15 cm ceramic heat exchanger for increased performance;
- Fan positioned after the heat exchanger, facing outward, for quiet operation with alternating flows of 70 sec;
- External grille designed to reduce noise from outside;
- Beep signal and LED for signaling command acquisition;
- Master-Slave programming simplified by dip-switches;
- Class G3 filters;
- Ease of assembly;
- Easy maintenance without disassembling the wall unit;
- Inner cover included.

FEATURES AND FUNCTIONS OF THE MULTIFUNCTION REMOTE CONTROL (FOR DUO AND WIRELESS MODELS)

- Night function (5 m³/h) and 3 speed levels (10, 20, 30 m³/h);
- 3 humidity levels: 40%, 60%, 90%;
- Boost extraction function (timed for 20 min);
- Physical remote control lock/unlock key;
- Filter reset button;
- Device operation status information display;
- Touch buttons;

DELOCALIZED WALL HEAT RECOVERY UNIT

Delocalized HRV unit designed for a simple and effective solution for heat recovery ventilation for individual rooms without ductwork.

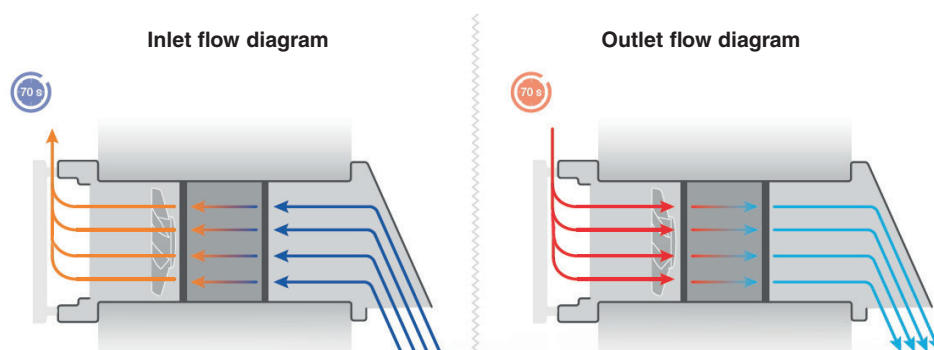

TECHNICAL SPECIFICATIONS

		FITT AGIX FLAT 30 BASIC PRO	FITT AGIX FLAT 30 DUO	FITT AGIX FLAT 30 WIRELESS	FITT AGIX FLAT 30 APP
Ventilation capacity [m³/h]		30	30	30	30
PVC pipeline	Ø [mm]	100	100	100	100
	length [mm]	500 (can be cut to 250 mm)			
Exchanger type		Ceramic	Ceramic	Ceramic	Ceramic
Operation		Alternating flows	Alternating flows	Alternating flows	Alternating flows
Master-Slave Connection		No	Cable	Wireless	APP
Command		Basic remote control	Remote control with multifunction display SMARTPHONE		
Night function and boost function for extraction		-	✓	✓	✓
On/off switch on board unit		✓	✓	✓	✓
Visual function indicator and filter cleaning		-	✓	✓	✓
Built-in twilight and hygrostat with 40%, 60%, 90% thresholds		-	✓	✓	✓
Speed levels		2: min and max	4: night + 3 speeds	4: night + 3 speeds	4: night + 3 speeds
Indoor unit H x W x D [mm]		250x233x42	250x233x42	250x233x42	250x233x42
Noise at min/max speed at 3 m [dB].		18/37	18/37	18/37	18/37
Power consumption at maximum speed [W]		6,9	6,9	6,9	6,9
Weight [kg]		4,3	4,3	4,3	4,3
Filter classification		G3	G3	G3	G3
Degree of protection		IPX4	IPX4	IPX4	IPX4

FITT AGIX FLAT 30

Code	Description
VMA30-FLAT-B1	FITT AGIX FLAT 30 BASIC PRO - BASIC REMOTE CONTROL
VMA30-FLAT-D	FITT AGIX FLAT 30 DUO - night + 3 speeds MULTIFUNCTION REMOTE CONTROL - Master/Slave via cable
VMA30-FLAT-W	FITT AGIX FLAT 30 WIRELESS - night + 3 speeds MULTIFUNCTION REMOTE CONTROL - Wireless Master/Slave
VMA30-FLAT-APP	FITT AGIX FLAT 30APP with smartphone app

The WIRELESS version is equipped with:

- Wireless communication between units;
- Remote control with display included;
- Built-in humidity sensor and twilight sensor, enabling various automatic operation modes (see remote control);
- Ability to manage up to 16 units within a system in master/slave mode, with simple configuration via dip switches;
- 4 settable speeds (including 1 night speed).

The APP version is equipped with:

- Communication via WiFi between the units;
- Ability to control the units from smartphones with the Air.app even remotely;
- Built-in humidity, twilight, temperature and VOC sensors that enable various automatic operation modes;
- SMART mode that allows comparison of indoor and outdoor air quality data by connecting to the nearest weather station by which the product will automatically adjust;
- Ability to configure up to 16 units within the system via APP;
- 4 settable speeds (including 1 night speed).




BASIC REMOTE CONTROL FOR THE BASIC PRO MODEL

- ON/OFF: power on/off;
- V+: speed selection;
- V-: speed selection.



MULTIFUNCTION REMOTE CONTROL FOR DUO AND WIRELESS MODELS (included in delivery)

Night function (10 m³/h) and 3 speed levels (20, 40, 60 m³/h); 3 humidity levels: 40%, 60%, 90%; Boost extraction function (timed for 20 min); large display; touch buttons.



MASTER REMOTE PANEL (optional) FOR DUO AND WIRELESS MODELS

Available in the following versions:

- Panel for DUO unit
- Panel+CO₂ for DUO unit
- Panel for WIRELESS unit
- Panel+CO₂ for WIRELESS unit

ACCESSORIES

Code	Description	Suitable for
VMA30FILTERS	Kit no. 4 honeycomb filters	FITT AGIX FLAT 30 BASIC PRO / DUO / WIRELESS / APP (replacement)
VMA36-FLAT-DP	MASTER Remote Panel	FITT AGIX FLAT 30/60 - DUO
VMA36-FLAT-DPCO	MASTER remote panel + CO ₂ _{sensor}	FITT AGIX FLAT 30/60 - DUO
VMA36-FLAT-WP	MASTER Remote Panel	FITT AGIX FLAT 30/60 - WIRELESS
VMA36-FLAT-WPCO	MASTER remote panel + CO ₂ _{sensor}	FITT AGIX FLAT 30/60 - WIRELESS
VMGRESIR100	External folding grate DN100	FITT AGIX FLAT 30 BASIC PRO / DUO / WIRELESS / APP