


Diffusore lineare senza terminali a 2 feritoie

LINEAR DIFFUSER WITHOUT 2-SLOT TERMINALS

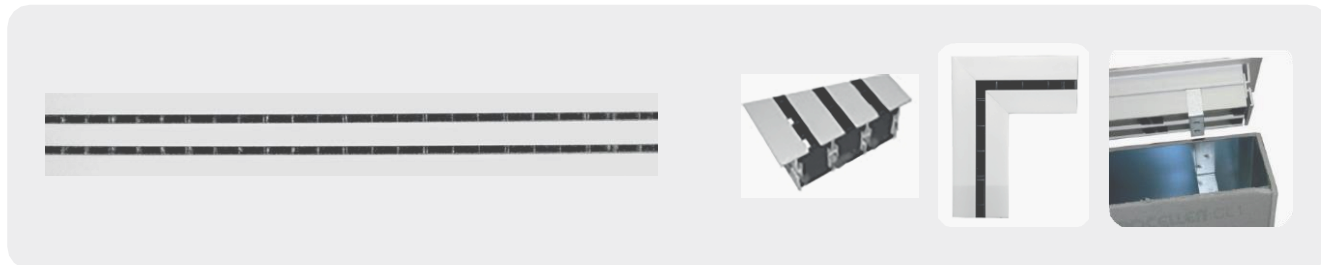

CARATTERISTICHE

Diffusore lineare a feritoie per l'installazione in linee continue, senza terminali [i terminali sono accessorio a parte per inizio e fine della linea continua], a ugelli direzionali (serie DLK/—A***_) oppure senza ugelli direzionali (serie DLK /—B***_).

Materiali di costruzione

- Per il telaio-cornice: PVC anticondensa.
- Per ugelli direzionali e relativi sostegni (per la serie DLK/—A***_): ABS.

Color

- For the frame-frame white RAL 9010.
- For directional nozzles and their supports (for DLK/-A--- series): black RAL 9005.
- For directional nozzles and their supports (for DLK series /-A---B): white RAL 9010.

Degree of extinction

Class V0.

Operating temperature

-30°C/+60°C.


Fixing method

- For diffusers (modules) to each other: FIXING of DLKs (plug-in accessory, by the customer), which consists of a series of hooks that engage in the frame of the diffusers to be joined.
- For fixing the diffuser on the plenum: bracket kit mod. ST/04 (separate accessory, with screws) consisting of brackets that attach, in turn, to brackets already prepared on continuous PAL plenum.

ACCESSORIES

- Sheet metal sliding calibration damper mod. S/04- (see datasheet. related),
- PVC terminal mod. T-, provided already fixed on either end of the line,
- PVC corner terminal for diffuser with nozzles mod. TA-,
- Corner PVC terminal for nozzle-less diffuser mod. TB-,
- Fixing DLK modules to each other mod. FIXING -,
- Bracket kit (for fixing diffuser on plenum in PAL) mod. ST/04 ,
- Polyisocyanurate foam plenum mod. PAL/04.

DIMENSIONS

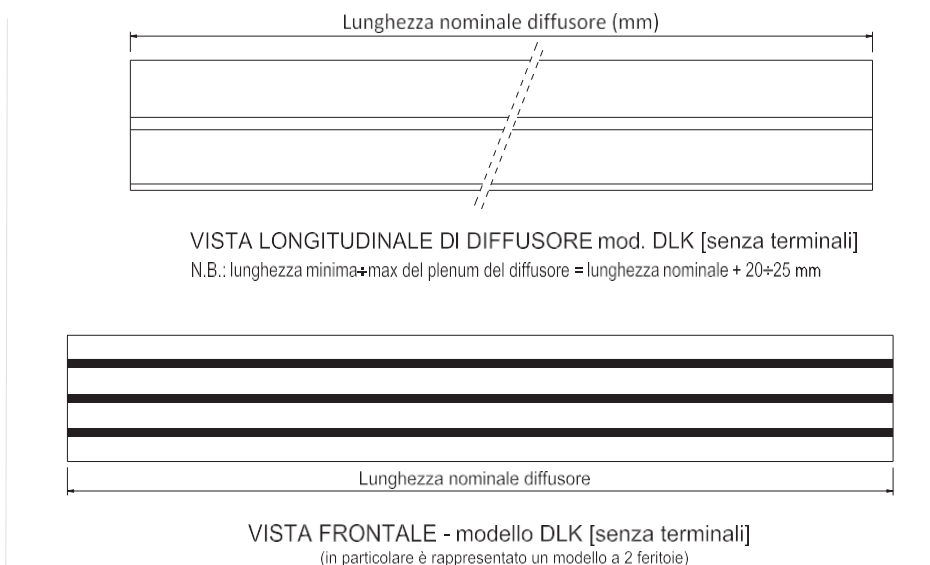


QUICK SELECTION TABLE


Code	Number of slits	Diffuser length [mm]	Effective area [m ²]	Flow rate (m ³ /h) with v = 1 m/s	Flow rate (m ³ /h) with v = 2 m/s	Flow rate (m ³ /h) with v = 2.5 m/s	Flow rate (m ³ /h) with v = 3 m/s	Flow rate (m ³ /h) with v = 4 m/s
				Pressure drop: 2 Pa	Pressure drop: 4 Pa	Pressure drop: 6 Pa	Pressure drop: 9 Pa	Pressure drop: 13 Pa
DLK/2A600_	2	600	0.0180	65	130	162	195	260
DLK/2A800_	2	800	0.0240	86	173	216	258	344
DLK/2A1000_	2	1000	0.0300	108	216	270	324	432
DLK/2A1500_	2	1500	0.0440	160	321	403	482	643
DLK/2A2000_	2	2000	0.0600	216	432	540	648	864

(*) Calculated for models equipped with directional nozzles-letter A in the code-and with the condition of fully open slots.

SECTIONAL DRAWINGS

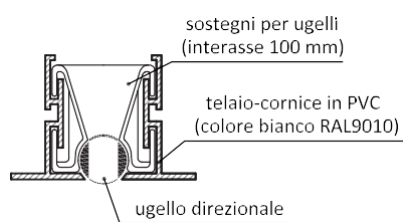


SEZIONE descrittiva

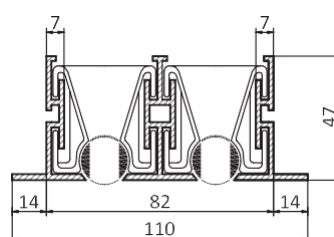

SEZIONE modello a 2 feritoie

GRAPHICS

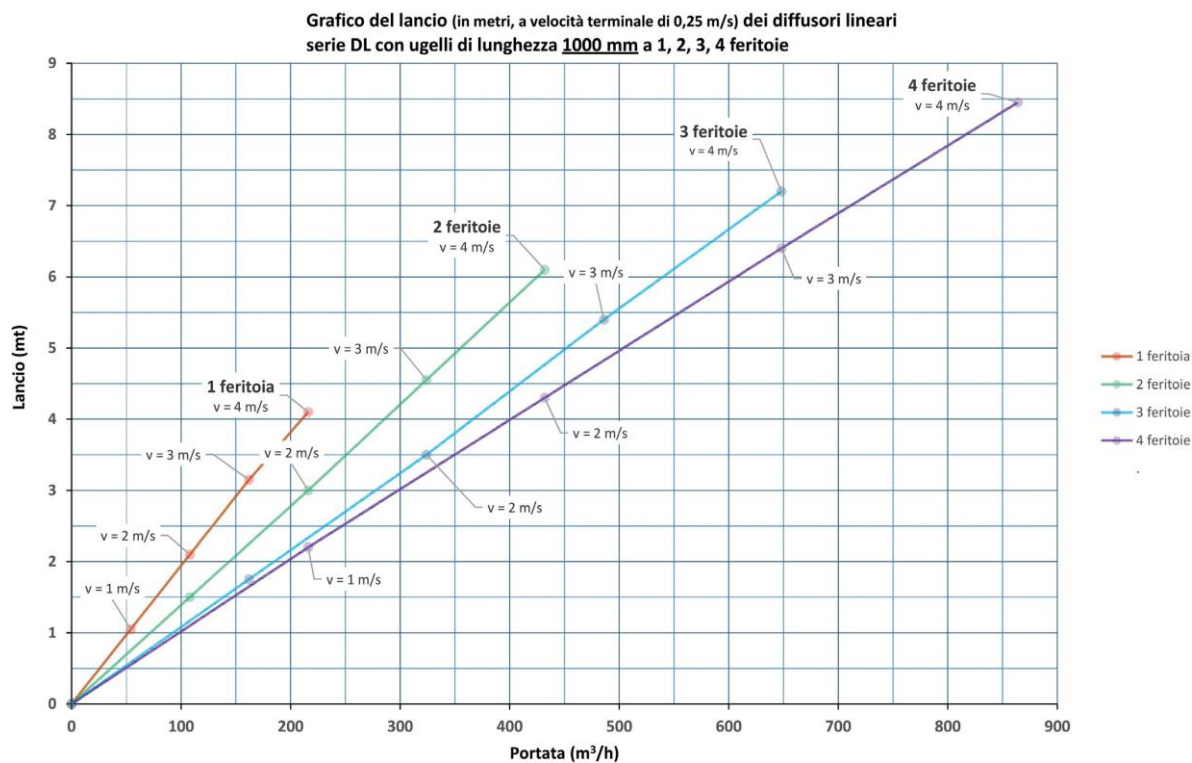

GRAPHICS

Launch graph (in meters, at terminal velocity of 0.25 m/s) linear diffusers series DL
with nozzles of length 1600 mm with 1, 2, 3 slots


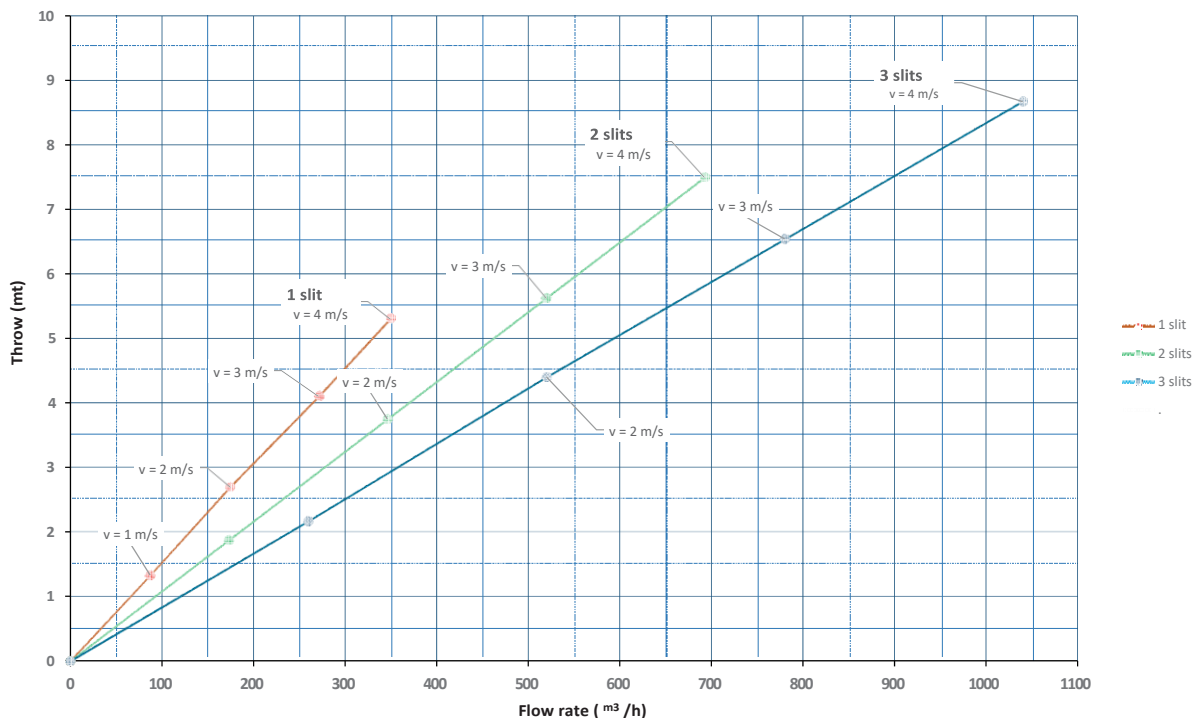


Grafico del lancio (in metri, a velocità terminale di 0,25 m/s) dei diffusori lineari
serie DL con ugelli di lunghezza 2000 mm a 1, 2, 3, 4 feritoie

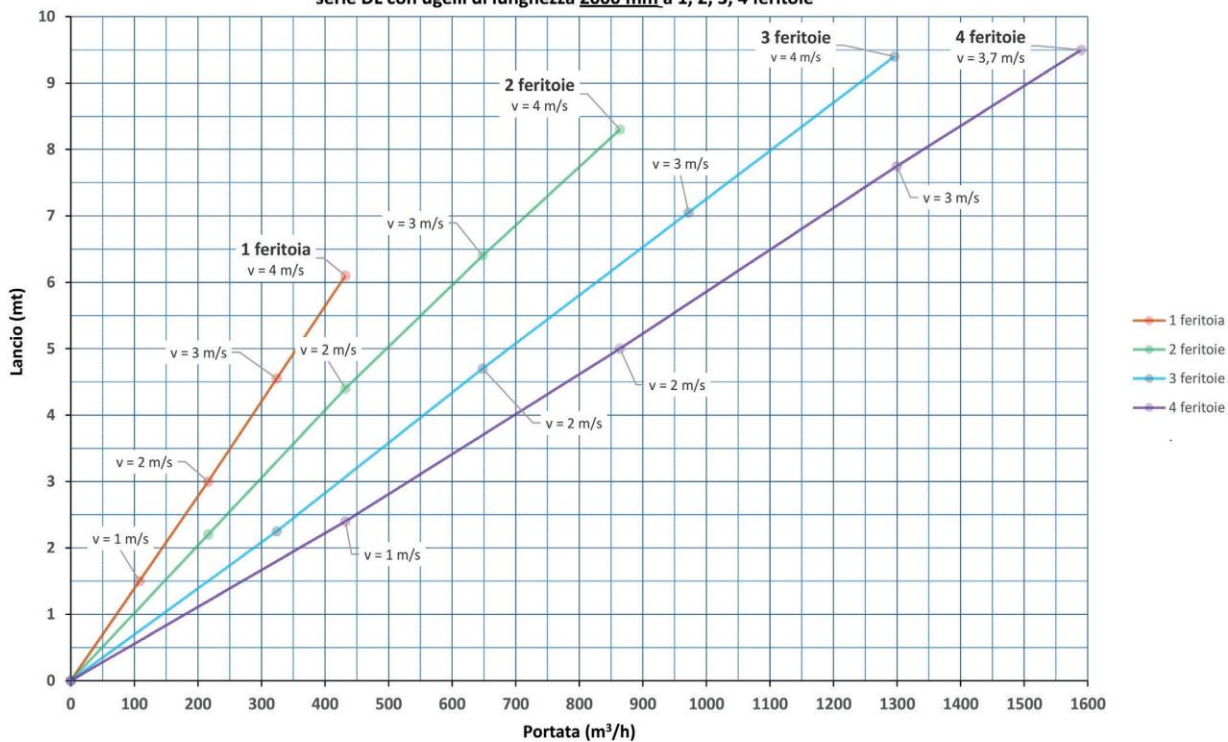

REV 04/2020