
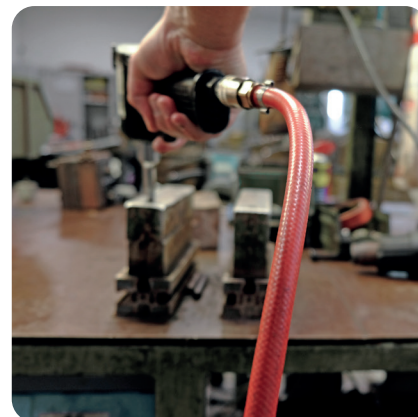


fitt refittex cristallo c

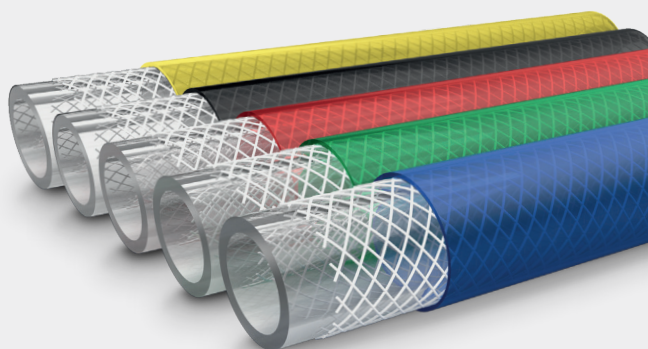

Tubo per uso industriale e alimentare per il passaggio di aria e di liquidi.

Conforme al Regolamento Europeo 10/2011 per il passaggio dei liquidi alimentari, FITT Refittex Cristallo C è anche ideale per il passaggio di aria compressa.

Struttura: Tubo flessibile colorato in PVC con rinforzo in poliestere ad alta tenacità.

Temperatura di utilizzo: -20°C / +60°C

- Elevata flessibilità.
- Buona resistenza alle aggressioni chimiche.

Hose for industrial and food use for the passage of air and liquids.

Compliant with the European Regulation 10/2011 for the passage of liquids, FITT Refittex Cristallo C is also ideal for the passage of compressed air.

Structure: PVC coloured hose with high tenacity polyester reinforcement.

Temperature of use: -20°C / +60°C

- High flexibility.
- Good chemical aggression resistance.



REACH¹
conforme

RoHS²
conforme

Senza
IPA³

Senza ftalati⁴
formula <0,1%

REACH¹
compliant

RoHS²
compliant

PAH³
free

Phthalate free⁴
formulation <0,1%



MOCA - Conforme al Regolamento Europeo 10/2011 per i Simulanti A-B-C-D1.
Conforme alla Regolamentazione 1935/2004/EC.

FCM - Compliant with European Regulation 10/2011 for Simulants A-B-C-D1.
Compliant with 1935/2004/EC regulation.

FITT REFITTEX CRISTALLO C

Marcatura | Marking: FITT REFITTEX CRISTALLO C DlxDE Reg.(EU) 10/2011 A-B-C-D1 PHTHALATE FREE - MADE IN ITALY

Pollici Inches [inc]	Ø int. Ø int. [mm]	Ø est. Ø ext. [mm]	Colore Color	Spessore Thickness [mm]	Pressione d'esercizio Working pressure [bar]	Pressione di scoppio Bursting pressure [bar]	Raggio di curvatura Bending radius [mm]	Lunghezza Length [m]	Peso nominale Weight per meter [g/m]	Pezzi per pallet Pieces per pallet [pcs]	Dimensione pallet Pallet dimension [cm]
-	5	10,5	● ●	2,75	26	78	18	100	81	30	80x120
1/4"	6	12	● ● ●	3	20	60	16	50	103	48	80x120
-	9	15	● ● ●	3	20	60	31	50	136	36	80x120
3/8"	10	16	● ●	3	20	60	35	50	147	36	80x120
1/2"	13	20	● ● ●	3,5	12	36	45	50	198	24	80x120
3/4"	19	26	● ●	3,5	10	30	95	50	296	14	80x120
-	32	40	●	4	7	21	240	50	543	5	80x120

Pressione di scoppio e di esercizio a 23°C | Working and Bursting pressure at 23°C

Diametri interni e tolleranze corrispondenti sono in conformità alla norma UNI EN ISO 1307 in vigore. La tolleranza della lunghezza è ± 5%.
Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

Legenda conformità normativa: 1. Regolamento REACH (EC) n. 1907/2006 / 2. Direttiva RoHS / 3. Regolamento AfPS GS 2019:01 IPA - Categoria 2 / 4. Senza ftalati (<0.1% peso/peso)
Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AfPS GS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free(<0.1% weight/weight)